



# AEC(CAN) BIM Protocol for Revit

*Additional detail and enhancements for implementation of the AEC(CAN) BIM Protocol*

Version 2

September 2014

Published as a supplementary document to the generic AEC (CAN) BIM Protocol

## Trademarks

Autodesk, Revit, and Navisworks are registered trademarks of Autodesk, Inc. All other trademarks are the property of their respective owners.

# AEC(CAN) BIM Protocol for Revit

## Contents

<b>1</b>	<b>Introduction</b>	<b>5</b>
1.1	<i>Background – AEC(CAN)</i>	5
1.2	<i>AEC(CAN) CanBIM Designers Committee</i>	5
1.3	<i>Disclaimer</i>	6
1.4	<i>Scope</i>	6
1.5	<i>Update Procedure</i>	6
1.6	<i>Creative Commons Attribution-ShareAlike 4.0 International Public License</i>	6
<b>2</b>	<b>Legal Documents and Considerations</b>	<b>7</b>
2.1	<i>Model Release / Terms of Usage</i>	7
2.2	<i>Model Copyright</i>	9
<b>3</b>	<b>Project Startup</b>	<b>11</b>
3.1	<i>BIM Execution Plan (BxP)</i>	11
3.2	<i>Identification of BIM Uses</i>	11
3.3	<i>Satisfying BIM Uses</i>	11
3.4	<i>Information Exchanges &amp; Software Proficiency</i>	12
3.5	<i>Software Compatibility</i>	12
3.6	<i>Model Structure Documented in BxP</i>	13
3.7	<i>Templates &amp; Standards</i>	13
<b>4</b>	<b>Interoperability</b>	<b>14</b>
4.1	<i>Introduction</i>	14
4.2	<i>Modelling Protocols</i>	14
<b>5</b>	<b>Modelling Strategy</b>	<b>15</b>
5.1	<i>Model Development Strategy</i>	15
5.2	<i>Content Creation</i>	15
5.3	<i>CAD Drawing Content</i>	15
5.4	<i>Project Location &amp; Site Co-ordination</i>	17
5.5	<i>Linking Models</i>	17
<b>6</b>	<b>Modelling and Data Organization</b>	<b>18</b>
6.1	<i>General Principles</i>	18
6.2	<i>Worksets</i>	19
6.3	<i>Element Management</i>	20
<b>7</b>	<b>Project Folders</b>	<b>23</b>
7.1	<i>Introduction</i>	23
7.2	<i>Shared Content Folder Structure</i>	23
7.3	<i>Local Project Folder Structure</i>	23
7.4	<i>Project Folder Structure</i>	24
<b>8</b>	<b>Project Naming Conventions</b>	<b>25</b>



8.1	<i>Model File Naming Conventions</i>	25
8.2	<i>Workset Naming</i>	26
8.3	<i>View Naming</i>	27
8.4	<i>View List Scheduling</i>	28
8.5	<i>View Template Names</i>	28
<b>9</b>	<b>Graphics Style</b>	<b>29</b>
9.1	<i>Introduction</i>	29
9.2	<i>AEC (CAN) Compliant Materials</i>	29
9.3	<i>Text Assignment</i>	29
9.4	<i>Line Weights</i>	30
9.5	<i>Line Patterns</i>	32
9.6	<i>Line Styles</i>	32
9.7	<i>Hatching and Filled Regions</i>	32
9.8	<i>View Templates</i>	33
9.9	<i>Drawing Borders and Title Blocks</i>	33
9.10	<i>Annotation Symbols</i>	33
<b>10</b>	<b>Quality Control / Quality Assurance (QC / QA)</b>	<b>34</b>
10.1	<i>Model Maintenance</i>	34
10.2	<i>Central Files</i>	34
10.3	<i>Compacting Central and Local Files</i>	34
10.4	<i>Importing and Linking Files</i>	34
10.5	<i>Model Archiving Practice</i>	35
10.6	<i>Electronic Exchange between Consultants</i>	35
10.7	<i>Model Saving</i>	36
<b>11</b>	<b>3D Coordination</b>	<b>37</b>
11.1	<i>Approach</i>	37
11.2	<i>Model Consolidation</i>	37
11.3	<i>Coordination Meetings</i>	37
11.4	<i>Issue Resolution</i>	37
	<b>APPENDIX A - Definitions / Terms</b>	<b>38</b>
	<b>APPENDIX B – Stamp Recommendations</b>	<b>41</b>
	<b>APPENDIX C – Creative Commons Attribution-sharealike 4.0 international license</b>	<b>43</b>

# 1 INTRODUCTION

## 1.1 Background – AEC(CAN)

In 2011 CanBIM initiated discussions with AEC(UK) committee to develop a parallel protocol based on the AEC(UK) protocol. CanBIM believes that the AEC BIM community in Canada is better served by taking already existing, working standards and investing time in collaboration to make the current standard better, rather than simply reinventing and creating a unique standard for Canada.

Over time, the AEC(CAN) BIM Protocol has developed into a strong, standalone document. While some of the original framework is evident, the document has evolved with the Canadian market and reflects conditions from across the country. This latest version of the AEC(CAN) BIM Protocol for Revit is truly a Canadian document and has been developed by representatives of firms from across Canada. It is through the support of these firms that a document like the AEC(CAN) BIM Protocol for Revit can continue to be updated and remain relevant in our ever-changing industry.

## 1.2 AEC(CAN) CanBIM Designers Committee

CanBIM's members volunteer their time to participate in committees with representatives from architectural, engineering, and construction companies across Canada. These members are from firms both large and small, working on projects of all sizes.

### CanBIM AEC(CAN) Designers Committee

Bruce McCallum (Chair)	DIALOG
David Burch (Co-Chair)	IBI Group
Reed Munro	Cansel
John Oulton	DCC-CDC
John Hale	Department of National Defence
Martin Neault	DIALOG
Chris Heinaranta	DIALOG
Rob Wenarchuk	GEC Architecture
Sylvia Gacek	GEC Architecture
Jeff Livingston	GRC Architects
Peter Rankin	GRC Architects
Gareth Leach	Group2 Architecture Interior Design Ltd.
Vincent Plourd	Halsall Associates
Amal Madanat	Hariri Pontarini Architecture
Farhan Haqqani	IBI Group
Peter DeRooy	MMM Group Ltd.
Spencer Cripps	MMM Group Ltd.
Mirra Maheden	PCL Construction Management Inc.
Brent Conner	S2 Architecture
Michelle Ovelson	Summit BIM

## 1.3 Disclaimer

The recommendations outlined in this document are for informational purposes only. The authors and contributing companies take no responsibility for the utilization of these procedures and guidelines. Their suitability should be considered carefully in the contexts of your projects before embarking upon any integration into your current workflow.

None of the recommendations in this document are intended as a replacement for companies that already have a working BIM Protocol.

## 1.4 Scope

This supplementary document is intended to support all BIM work undertaken using Revit across a practice, or on a specific project, unless otherwise dictated by the client.

The AEC(CAN) BIM Protocol for Revit v2 builds on the procedures and methodologies defined in the AEC(CAN) BIM Protocol v2 and should be read in conjunction with that document.

Terminology and reference to functionality is based around the Revit platform.

### 1.4.1 Revit Version

This document focuses on Revit 2014 and does not consider changes in previous versions of the software. Although some earlier versions of the software will be applicable, new features may negate some recommendations.

## 1.5 Update Procedure

Proposed changes and additions to this standard should be submitted in writing to the CanBIM Designers Committee with accompanying examples, discussion, or other supportive material. Feedback will be gathered, continuously reviewed, and collated to form new revisions to this document at appropriate intervals. Please post these comments and ideas on the [Canada BIM Council](#) website.

It is expected that this standard will undergo a relatively rapid evolution process as the industry adapts to the implications and advantages of BIM methodology.

## 1.6 Creative Commons Attribution-ShareAlike 4.0 International Public License

This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](#). Please see Appendix C for license details.

## 2 LEGAL DOCUMENTS AND CONSIDERATIONS

When a model author seeks to electronically share the design and drawing files with another party, a Terms of Usage letter should be executed and sent out to that party for signature. Once the original Terms of Usage letter is returned bearing the signature of a person with signing authority and indicating acceptance of the Terms of Usage, the model author can then release the model for use by the other party.

### 2.1 Model Release / Terms of Usage

#### 2.1.1 Terms of Usage from Consultant to Constructor

Signing the Terms of Usage indicates acknowledgement and acceptance that the transmitted BIM Project Files may represent an imperfect data set with the potential to contain errors, omissions, conflicts, inconsistencies, improper use of modelling components, and other inaccuracies. The Level of Development provided in the BIM Project Files should be appropriate to the contractual services and is not intended to represent construction geometry, means and methods for project delivery, or other detailed information associated with Levels of Development that form the contractual responsibilities of the Constructor:

- Information contained in BIM Project Files does not form part of the Contract Documents and is transmitted for information purposes only and is used at your own risk.
- Contract Documents will govern in the event that there is a discrepancy between BIM Project Files and the Contract Documents; the Prime Consultant will not respond to Requests for Interpretation (RFIs) arising from use of BIM Project Files.
- The information transmitted represents the current state of BIM Project Files on the date the electronic file is produced; the Prime Consultant will not issue updated versions of BIM Project Files except at the Prime Consultant's sole discretion.
- The Constructor will remain responsible for establishing and confirming site dimensions and project conditions as well as for resolving construction issues associated with the work in accordance with the requirements of the Contract Documents.

The information requested is transmitted in the Revit format used for production of BIM Project Files and in Navisworks file sharing format, which contains the electronic design and drawing files created by the Prime Consultant:

- BIM Project Files will be issued in a self-extracting file format that requires additional acceptance of an electronic disclaimer ([see Section 2.1.2 Sample Disclaimer](#)) and will be available from a File Transfer Protocol (FTP) site established by the Prime Consultant's BIM Manager.

- The Constructor must obtain additional signatures for each Subcontractor with whom BIM Project Files will be shared. Procedures that bind all Subcontractors to the same Terms of Usage established in the Terms of Usage letter and as described in the project specifications must be established by the Constructor.
- The Constructor is permitted to share this information only with Subcontractors working on this project; neither the Constructor nor any Subcontractors working on this project will be permitted to transmit or share the information contained in BIM Project Files to any third party.

The information contained in BIM Project Files is provided for the convenience of the Constructor who agrees to indemnify and hold harmless the Prime Consultant to the fullest extent permitted by law from any damage, liability, or costs including and without limitation to any special, indirect, or consequential damages arising from use of BIM Project Files.

The Prime Consultant assumes no responsibility and disclaims any liability to any person or entity for any loss or damages including and without limitation to any special, indirect, or consequential damages caused by errors or omissions contained within BIM Project Files, whether resulting from negligence, accident or other cause.

### 2.1.2 Sample Disclaimer

By executing this self-extracting file, the user agrees that they will be bound by the following conditions and disclaimers:

1. The information contained in this self-extracting file was prepared to meet the express purposes of the Consultant's contract with the Owner and relates specifically to the associated Project and Contract Documents.
2. The information in the self-extracting file does not form part of the Contract Documents unless specifically designated as such in the Project specifications.
3. The user shall not transmit the information in the self-extracting file to any third party without the prior written consent of the Consultant.
4. The consultant makes no warranty or guaranty that dimensions provided or established from electronic drawing files represent actual site conditions:
  - a. The user shall remain responsible for establishing and confirming site dimensions and project conditions except as limited below.
  - b. In the event that there is a discrepancy between electronic drawing files provided to the User and Bid Documents and Addenda, Bid Documents and Addenda shall govern.
  - c. In the event that dimensions are not indicated, they shall not be scaled electronically from electronic drawing files. Missing dimensions shall be brought to the attention of the Consultant, who



- will determine dimensions or direct method for determination of missing dimensions.
- d. Bring to the attention of the consultant any discrepancies between the information provided in the self-extracting file and the Contract Documents. The consultant will, at their sole discretion, determine the correct interpretation of the information or direct the method of interpretation for the information.
5. The information in the self-extracting file is provided for the convenience of the user. The user, and any third party to which the user transmits the information, agrees to indemnify and hold harmless the Consultant to the fullest extent permitted by law from any damage, liability or costs (including, without limitation, special, indirect or consequential damages) arising from the information. The Consultant is not liable for any unauthorized use of information in the self-extracting file such as:
- a. Use of supplied electronic drawing files for any subsequent Project is strictly forbidden without express written consent of the Consultant.
  - b. The Consultant will not be held liable for any unauthorized use or modification of electronic drawing files provided.
  - c. The Consultant expressly disclaims any warranty or assurance that electronic drawing files will remain accurate beyond date that files were created.
  - d. The Consultant assumes no responsibility and disclaims any liability to any person or entity for any loss or damages including any special, indirect or consequential damages caused by error or omissions in electronic drawing files and format provided, whether resulting from negligence, accident or any other cause.

## 2.2 Model Copyright

One method of protecting proprietary information in the Revit model is to include a copyright notice on a drafting view which serves as the default when opening the model. An example of a copyright notice from IBI Group (with permission) follows:

“Any reproduction or distribution for any purpose other than authorized by IBI Group is forbidden. Written dimensions shall have precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on the job and IBI Group shall be informed of any variations from the dimensions and conditions shown on the drawing. Shop drawings shall be submitted to IBI Group for approval before proceeding with fabrication.”

### 2.2.1 Professional Stamps

Good practice dictates that electronic forms of professional stamps and seals should not be distributed in a reproducible format. This may be challenging if the architect or engineer is using Revit to stamp drawings. A final decision on this matter is beyond the scope of this report, but Appendix B contains applicable excerpts from the respective jurisdictions of governing architectural organizations.

## 3 PROJECT STARTUP

### 3.1 BIM Execution Plan (BxP)

A **BIM Execution Plan (BxP)** is a living, collaborative document used to communicate the overall vision and procedures for BIM implementation to project stakeholders. Developed at the early stages of a project, the BxP should continually grow and be updated according to changing project requirements. The BxP should perform the following functions:

- Identify the appropriate BIM goals and uses for the project.
- Design the BIM execution process.
- Define the BIM deliverables.
- Identify the supporting infrastructure needed to successfully implement the plan.

For more information on the BxP, please refer to the most recent version of the *AEC(CAN)BIM Protocol*.

### 3.2 Identification of BIM Uses

The utilization of Revit is often confused as synonymous with the implementation of BIM. The distinction must be made between BIM as a process to develop and transfer digital information of a building project throughout its entire life cycle and Revit as a specific software application used to author some of that digital information – namely, as a tool to support BIM. Therefore, significant consideration should be undertaken to identify and verify how Revit can be used to satisfy specific uses of BIM based on project and team goals. The identification of BIM goals and uses, as well as other important processes used to execute BIM, should be captured in a BxP.

Before beginning any project in Revit, a BxP should be drafted in order to steer the direction of the modelling effort, to ensure that all parties understand the level of effort and technological infrastructure required to achieve the deliverables, and to communicate the collaboration procedures needed to successfully execute the desired BIM outcomes.

The following subsections contain considerations that should be discussed during the initial project start up meetings and documented in the BxP with regard to using Revit as a tool to aid in the execution of a BIM project

### 3.3 Satisfying BIM Uses

Identify how (or if) Revit will be used to satisfy the desired BIM uses and goals: either as a stand-alone application, utilizing third-party plug-ins, or in conjunction

with other BIM software. Most commonly, Revit is identified in the BxP as the tool to achieve the BIM goal of design authoring. Some other goals could include (but are not limited to):

- Existing Conditions Modelling
- Phase Planning
- Site Analysis
- Energy Analysis
- Lighting Analysis
- 3D Coordination
- Quality Control Checks
- Site Utilization Planning
- Building System Analysis
- Record Modelling

### 3.4 Information Exchanges & Software Proficiency

Determine the information exchanges that will occur between project participants and assess the level of effort and skill in Revit that will be required to facilitate those exchanges.

- The content of this information exchange should be documented in an information-exchange worksheet or modelling matrix, detailing who will be responsible for which model element and the Level of Development (LOD) that will be required at defined project milestones.
- Clearly communicate the required LOD deliverables at various project stages in a collaborative environment and identify any possible impediments that may occur due to a lack of Revit proficiency among modelling participants/disciplines. Identifying these potential deficiencies allows the BIM team to develop mitigation strategies to successfully overcome these challenges.
- Consider what family and project parameters will be required to satisfy required model LOD and to perform certain analysis (e.g. lighting, energy, 3D coordination) outlined as BIM deliverables in the BxP.

### 3.5 Software Compatibility

Ensure interoperability and compatibility of Revit software with team participants to satisfy BIM goals.

- Technological infrastructure needs should be tabled in the BxP, outlining the software and version to be employed by each discipline to achieve BIM deliverables (e.g. Design Authoring, Design Analysis, and Construction Coordination). Any incompatibility issues should be resolved prior to commencement of any modelling activities.
  - Minimum hardware and technological requirements needed to facilitate these BIM processes should also be outlined in the BxP.

### 3.6 Model Structure Documented in BxP

A consensus must be reached by project team members on how the Revit model will be created, organized, and controlled. This consensus should be documented in the BxP and should include the following elements:

- File naming structure
- Model structure and workset definition
  - by discipline, distinct building, site, floor, zones, and/or building system
- Measurement and coordinate system
- Use of copy/monitor function
- Agreed upon BIM & CAD standards

For detailed best practices and protocols regarding these above items, please refer to the appropriate sections found within this document.

### 3.7 Templates & Standards

Depending on the nature of the project as well as the needs of the client and consultants, certain defined standards may be required that are best met utilizing a Revit template with preloaded families, generic project information, unit settings, predefined views and plotting settings.

## 4 INTEROPERABILITY

### 4.1 Introduction

Interoperability allows for the concept of geometry and data to flow smoothly between major project phases (Design, Design Development, Contract Documents, Construction, and Operation). As a guiding principle, keep models in their native authoring formats to help maintain model integrity, reduce data loss, and reduce rework. Interoperability relies heavily on the project BxP and helps facilitate data transfers.

### 4.2 Modelling Protocols

Modelling protocols are required for interoperability to help promote data transfer with minimal reworks and data loss. To help support downstream modelling, the protocol should be stated within the project BxP and strictly adhered to.

## 5 MODELLING STRATEGY

### 5.1 Model Development Strategy

Standard templates will be provided to facilitate a Model Development Strategy, which shall be used to develop projects in early stages as strategizing enables rapid model development and allows for very large models to be created with low hardware requirements.

**EXCEPTION** must be made for MEP system components. Errors can occur in swapping one MEP system component for another, and so the above methodology shall be used only on components which are not system related.

### 5.2 Content Creation

- A component may make use of Coarse, Medium and Fine levels of detail to control graphical representation.
- Creation of a project-based shared parameter file is encouraged in order to maintain consistency of variable naming during content creation. Where multiple LOD of the same element exist, care should be taken to ensure that the same shared parameters are incorporated into the objects in order to maintain data integrity.

### 5.3 CAD Drawing Content

- Avoid importing CAD. Transfer 2D CAD into Revit-related objects.
- When CAD data is linked into a project, the design teams shall ensure that the latest validated and checked design information is accessed directly from the project-shared area when composing drawing sheets.
- CAD Files should be purged and audited.
- Avoid CAD files using “Proxy Objects.”
- Ensure that XREFs are minimized. Bind XREFs.
- Try to avoid the use of CAD files with SHX-based fonts.
- CAD that represents content related to the building, such as Details, Sections, etc., should be inserted as detail objects.
- Try to minimize the use of CAD files required to support final documents wherever possible.

### 5.3.1 Sheet Composition Within the BIM

Project sheets should be established directly from views in the highest level BIM or federated model. Care shall be taken to ensure that any linked data is available and visible prior to the publication of documentation from the BIM.

Sheet views shall be used to ensure final document integrity.

### 5.3.2 Sheet Composition from Views/Output Files

Views exported from the BIM for sheet compilation in CAD, or for use as a background to other drawings in CAD, shall be placed on a plain border which clearly indicates the following:

- data is provided for information purposes only
- details of the origin of the data
- date of production or issue

Where output files are exported from the BIM for further 2D detailing in CAD, originators shall ensure that changes occurring within the BIM are correctly reflected and updated within the CAD files used to produce the final drawing.

If data from Revit in 'Real-World' co-ordinates needs exporting, then the export operation must be performed from a working view (such as a floor-plan) and not from a compiled sheet view.

Be sure to select Shared Coordinates in the export option.

Ensure also that the correct layering standard is selected when exporting to drawing format.


**Warning:** The integrity of exported views/output files from within a BIM environment must be checked for accuracy and content prior to drawing compilation.



## 5.4 Project Location & Site Co-ordination

BIM projects shall:

- Use real world co-ordinate systems through shared project coordinates.
- Be produced to true height above project datum.
- Adopt the established project Shared Coordinates system across all BIM data files to allow them to be referenced without modification.

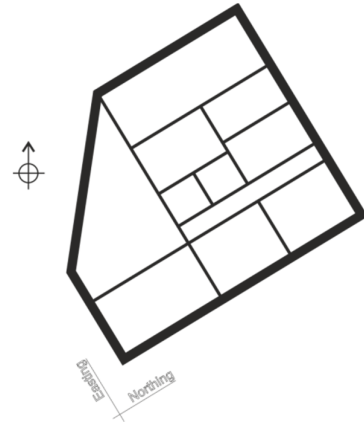

While the above rules are sacrosanct, Revit workflow dictates that individual building models are always created orthogonally to the screen and at zero elevation. The location of the building in terms of real-world coordinates, true heights, and Shared Coordinates system are all established and managed within the site model.

Some CAD files use real-world coordinates where site data can be more than 20KM from the origin (in any plane). These real-world coordinates need to be modified prior to import into Revit so that you don't get errors related to maximum size. Site information should be moved close to the origin of the CAD file, at project base point 0,0,0. In almost all cases, UTM coordinates are too large for Revit to work with natively in the CAD file. This translation shall be agreed and the shared coordinate system shall be based on it. Description should be consistent and documented in the BxP.

Real-world coordinates are then re-established in Revit using Shared Coordinates.

Data exported from Revit can then be either real-world or local, and while the majority of data will need to be delivered in OS coordinates for the purposes of collaboration and cross-referencing, some software (e.g. certain structural analysis software) requires data to be located at 0,0. For export to such software, local coordinate systems can be used.

## 5.5 Linking Models

### 5.5.1 Amongst Disciplines

Generally, within a discipline, project templates should be duplicated using the exact same shared project coordinates and names.

### 5.5.2 Between Disciplines

Provided linked models should not change names between issued versions. All disciplines should agree to Shared Coordinates methodology.

## 6 MODELLING AND DATA ORGANIZATION

### 6.1 General Principles

A number of methods exist that enable collaborative working in a BIM environment, such as working practices and team management as well as the technological solutions covered by the remit of this document.

This section deals with the principles of segregating a model for the purposes of:

- multi-user access
- operational efficiency on large projects
- interdisciplinary collaboration
- software limitations
- hardware limitations

The terminology refers primarily to the Revit subjects of **Worksets** and **Linking**, both of which are referred to herein as model segregation. The following practices shall be followed:

- The methods adopted for segregation should take into account and be agreed upon by all internal and external disciplines involved in the modelling.
- Models shall initially be created as isolated, single-user files. The model will be segregated as it becomes larger or as additional members of the design team are introduced.
- No more than one building should be modelled in a single file.
- A model file should contain data from one discipline or project stakeholder only, although exceptions may apply for building services where multiple disciplines converge.
- Additional model segregation may be required to ensure that model files remain workable on available hardware. (As a basic guide, on a machine built to the Autodesk recommended hardware specification, files exceeding 300MB should be reviewed with respect to performance and possible further segregation. Ideally files shall not exceed 350MB; for projects containing more than 1200 sheets within a single project, the performance of the “Synchronize with Central” will dramatically decrease.)
- In order to avoid duplication or coordination errors, clear definition of the data ownership throughout the life of the project should be defined and documented. Element ownership may transfer during the project time-line, but this should be explicitly identified in the BxP.
- Where multiple models make up a single project, a container model, whose function is to link the various assemblies together for coordination/clash detection purposes, should be considered.

- Naming conventions are critical for each file. The BIM file name should not change for duration of the project unless communicated to all involved parties.

## 6.2 Worksets

Worksets allow multiple users to simultaneously work on a model file through use of a central file and synchronised local copies. Properly utilized, worksets significantly improve efficiency and effectiveness on large and multi-user projects.

- Appropriate worksets should be established and elements assigned, either individually or by category, location, task allocation, etc.
- To improve hardware performance, only the required worksets should be opened. Revit ensures that elements contained in closed worksets are still updated if changes made in open worksets impact them during model regeneration.
- Due to potential data degradation, a new local file should be created each time you close down the local file. Returning to an old local file is considered bad practice.
- Workset allocation should be carried out in a logical manner that allows for other members of the design team to collaborate and/or assist with the model development without recourse to complicated introductions to the project methodology.
- A project should be broken into a sufficient number of worksets to avoid congestion in workflow, providing the means for adequate control over the efficiency of the model.
- The borrowing permissions and workset ownership shall be managed.

Worksets should be named following the conventions defined in [Section 8.2, "Workset Naming."](#)

- All team members should "Save to Central" hourly.
- The Project BIM Co-ordinator should allocate a pre-defined, unique time slot for each team member to "Save to Central." This avoids slow machine and file response while other users try to save to the same central model.
- The "Worksharing Monitor" tool could be used to coordinate "Save to Central" commands across the team. Note that Worksharing Monitor does not work with Revit-server based models, so a more manual means needs to be adopted.
- Users should not leave the "Save to Central" process unattended and should resolve any issues that arise to avoid delays to other team members.
- If accidentally saving to central while another user is saving to central, the user should abort the attempt to "Save to Central," continue working, and "Save to Central" after the last user has finished his save.

## 6.3 Element Management

Two methods exist for setting permissions that enable multi-user access to a model file through use of worksets:

“**Element Borrowing**” is used most commonly in day-to-day workflow.

- Users will access elements and lock them as needed.
- Requests for elements are managed through the Workset Manager or Worksharing Monitor. Note that Worksharing Monitor does not work with Revit-server based models, so a more manual means needs to be adopted.

“**Workset Ownership**” should be used when:

- restricting access of a particular aspect of the building to a single user.
- a user needs to operate away from the network and still be able to work, although caution is required to ensure that only “owned” worksets are edited.
- working collaboratively over a slow or remote network.

In practice, these methodologies take the following forms:


### Element Borrowing

- Users work as though in isolation on a single-user file.
- Permission to modify an element is sought and either given or denied by a live link to the central file.
- All permissions collated in this manner have to be relinquished during the “Save to Central” process

### Workset Ownership

- A user takes ownership of an entire workset.
- The local file does not need to query the central file for permission to modify any element allocated to that workset.

Take **OWNERSHIP** of  
an entire workset



**BORROW** elements  
from workset as  
required



NB/ Users only need to  
open required worksets



### 6.3.1 Inter-Disciplinary Model Segregation


When working within a multi-discipline environment and large complex projects, segregating a model into a number of smaller sub-models, the extents of which are to be agreed with the project team and documented within the BxP, is advisable. A Model Matrix will be required to explain and communicate the linking methodology with a key diagram to assist.

Linking model files enables additional geometry and data – this may be either other parts of a project which are too big to manage in a single file or data from another discipline or external company – to be referenced into a model.

Consider the following key points when linking files:

- Task allocation should be considered when dividing the model so as to minimize the need for users to switch between models.
- Division should be determined by the lead architect and/or engineer in conjunction with the BIM Co-ordinator and then documented in the BxP.
- The real-world coordinates should be established using “Shared Coordinates” for relinking of the models using the “Project Location” tools.
- Each sub-model should be reopened and the other sub-models linked in as required using the “Specify Shared Coordinates” insertion method.

When splitting a file into sub-models, the below workflow should be followed:

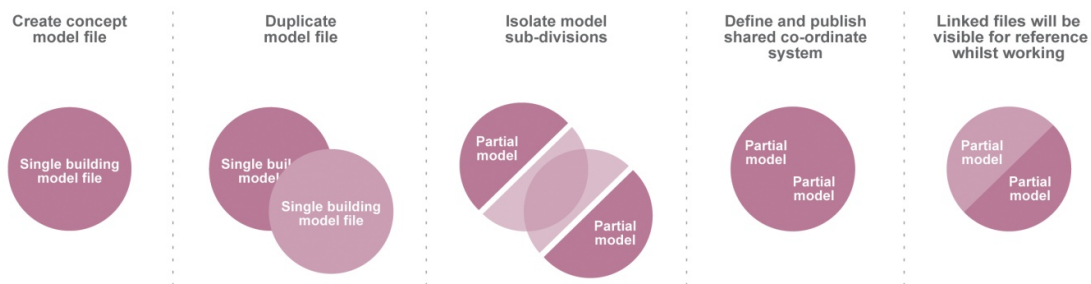

Each separate discipline, whether internal or external, involved in a project should have its own model and is responsible for the contents of that model. A discipline can link in another discipline's shared model for reference.

- Shared Coordinates and Project North rotation should be agreed upon and documented at the outset. No deviation from this agreement should occur without permission from the BIM Co-ordinator and Surveyor or Civil Consultant.
- Details of any discipline-specific requirements, such as the difference between Finished Floor Level (FFL) and Structural Slab Level (SSL), should be fully documented in the BxP.
- The Copy / Monitor tools in Revit should be used to duplicate and relate levels and grids only.

- The Copy / Monitor tools should not be used for other element categories without a full understanding of limitations, such as the creation and update of certain elements is not reflected in the monitoring process.
- Ownership of elements should be properly communicated and tracked through the project timeline. For example, floors may be created by the architectural team but are then adopted by the structural team to form part of the load-bearing structure.
- Each discipline should be conscious that referenced data has been produced from the perspective of the author and may not be modelled to the required specification for other purposes. In this case, all relevant parties, with input from the BIM Manager(s), should convene to discuss the potential re-allocation of ownership.
- A “**Start Model**” may be distributed to consultants and partners who can then link this “**Start Model**” into their respective discipline models. Model names are defined in the BxP. Shared Coordinates should be used in all cases.

With models produced for Building Services, several disciplines may be collated in a single model, as a single piece of equipment may require connection to various services. In this scenario, the model may be split in various ways, and the BIM Co-ordinator should be consulted in defining the project-specific strategy for splitting up models.

## 7 PROJECT FOLDERS

### 7.1 Introduction

Project folders are an important part of being able to support multiple users on workshare-enabled projects. The following recommendations are made to establish primary content locations in order to support these shared projects.

### 7.2 Shared Content Folder Structure

Establishing a central resource for shared content on your networks is recommended.

- Standard templates, titleblocks, families and other non-project-specific data should be held within the server based central resource library, with restricted access.

```
- <SERVER NAME>\Resource\RAC2012
    + Titleblocks
    + Standards
    + Templates
    + Families
```

All locations for the storage of family components should be sub-divided as follows:

```
- Families
  + 
    - Architecture [Architectural components]
    - Mechanical Services [MEP components]
    - Structure [Structural components]
    - General [Non discipline-specific elements]
    - Autodesk_Metric_Library [OOTB - Default supplied components]
    - Material_Library [Textures libraries and images for render output]
```






### 7.3 Local Project Folder Structure

Local copies of central project models do not need to be backed up as changes are regularly synchronized with the central model. They should be stored on the user's hard drive – **not in “My Documents”**– according to the folder structure below:

```
- D:\ [Standard local drive]
  - BIM_Projects [Storage of Revit local projects]
    - <Project Name> [Name of project]
```

## 7.4 Project Folder Structure

Project folders should follow internal guidelines for file and folder locations. Allow for the following folders, directly below the main model location, in Revit projects.

-  <Project Folder>
  - +  Data [Contain all data links such as shared parameters, etc.]
  - +  Links [Contain all CAD links to the project]
  - +  Templates [Templates that are specific to the project]
  - +  Families [Families that are specific to the project]



## 8 PROJECT NAMING CONVENTIONS

### 8.1 Model File Naming Conventions

Suggested name conventions may be over-modified by removing fields not needed. What follows is an outline of possible fields that can be used from small to large projects.

Naming of model files should be based on the following:



Field 1:	<b>Project</b> (Recommended 7 digit number): An abbreviated consultant project number.
Field 2:	<b>Originator</b> (Recommended 3 characters): An abbreviated code identifying the originator consultant.
Field 3:	<b>Discipline / System</b> (Recommended 2 to 4 characters): ARCH, MECH, ELEC, or STRU.
Field 4:	<b>Zone</b> (Optional 2 characters depending on the project size and complexity): Identifier of which building, area, or zone of the project the model file relates to if the project is sub-divided by building, area or zones.
Field 5:	<b>Level</b> (Optional 2 characters depending on the project size and complexity): Identifier of which level or group of levels the model file relates to if the project is sub-divided by levels.
Field 6:	<b>Description</b> (Optional): Descriptive field to define the type of data portrayed in the file, which can be used to describe any part of the previous fields or to further clarify any other aspect of the contained data.. Avoid repeating information codified in other fields.

Examples



Model File Name	Description
<b>1811002-MMM-MH-14-MR.rvt</b>	Project 1811002, MMM Model Author, HVAC, Mechanical Room, 14 <sup>th</sup> floor, Central File
<b>1811003-MMM-MECH.rvt</b>	Project 1811003, MMM Model Author, Mechanical, Central File
<b>1811004-MMM-ELEC.rvt</b>	Project 1811004, MMM Model Author, Electrical, Central File
<b>1811005-MMM-PL-A2.rvt</b>	Project 1811004, MMM Model Author, Plumbing, Zone A2, Central File

In workset-enabled files opened with “Create New Local” checked in Revit, the current username will be appended to the end of the central filename.

## 8.2 Workset Naming

Worksets should be named in a consistent and logical manner to aid navigation through the project. Note that worksets for all disciplines should be defined in the BxP so that all consultants know what to expect from linked models.

Some architectural examples follow:

**0.0 Links TEMP:** Any external CAD/Revit/SketchUp links for reference only – not to be printed.

**0.1 Links PRINT:** Any external CAD/Revit/SketchUp links TO BE PRINTED.

**0.2 Point Clouds:** Point Clouds.

**0.3 Links REVIT:** All Revit model links. *Note that having a separate workset for each linked model on large projects is advisable.*

**1.0 Structure:** All structural elements including core, slabs and columns.

**2.0 Vertical Connection:** Stairs, elevators, escalators, etc.

**3.0 Exterior Shell:** Entire exterior shell of the building including any exterior doors, balconies, railings, etc.

**3.5 Curtain Wall:** All curtain wall components.

**4.0 Interior:** Walls, doors, openings, and anything inside the skin boundary that is not structural, vertical connection or furniture.

**4.1 & 4.2 Furniture Layouts:** All furniture and free components placed in the model.

**5.0 Site:** Anything that is part of the site, landscape, or softscape.

**5.1 Parking:** Anything that relates to surface parking or parking enclosure that is not structural or vertical connection

**Shared Levels and Grids:** Default workset for level markers and grid lines.

**Workset 1:** Default workset to be used for all elements that do not fit into any other workset such as drafting elements, areas, tags, etc.

**Reference:** Workset contains all reference elements such as reference points, reference lines, or reference planes. These are reference planes that do not directly relate to some other workset section.

## 8.3 View Naming

This standard is limited to drafting views and sheet views (although the Project Browser includes other kinds of elements).

- A view to be used as a substructure or superstructure section. In this instance, the view property "Title on Sheet" shall be renamed to "SECTION."
- A view to be used as a wall or framing elevation. In this instance, the view property "View Name" shall be similar to "VB-2" and the view property "Title on Sheet" shall be similarly renamed to "Framing Elevation – VB-2."
- Level names are spelled out as they need to appear in a room schedule (as well as how they will appear in sections and elevations.) Do not pad the level number with leading zeros.
- Views **shall not** be named in order to make them sort or group more logically in the Project Browser as the grouping and filtering settings take care of that automatically – that is, the prefixing of level names by sequential numbers.
- View names should be written in UPPERCASE.
- View types should be created according to their use.

Creation of temporary working views is encouraged. Special views should be grouped and named to indicate their uses.

## 8.4 View List Scheduling

Two pre-defined schedules are included in the templates to manage the views – namely, the **Publication View List** and the **WIP View List**, which contain columns for the following data:

Publication View List				
View Name	Title on Sheet	Scale Value 1:	Sheet Number	Sheet Name

WIP View List		
View Name	Scale Value 1:	Detail Level

Views are grouped by type within both schedules in order to aid navigation. Leaving these schedules unchanged in favour of creating new schedules, should the need arise to make this information available externally in a different format, is recommended.

## 8.5 View Template Names

View Templates is an effective way to control view and graphics settings across view types. Generally, Revit sub-divides view templates by type: plan, section, and elevation.

## 9 GRAPHICS STYLE

### 9.1 Introduction

This section defines the criteria that ensure the plotted appearance of drawing output from the BIM is consistent and of the highest quality. These criteria are embedded within the associated discipline-specific template files which accompany this document.

### 9.2 AEC (CAN) Compliant Materials

Three discipline-specific Revit project templates are available as part of this standard. They can be obtained from the [www.aec-uk.org](http://www.aec-uk.org) website and are maintained by the AEC (CAN) BIM committee.

Additionally, a number of family templates are included. These templates provide an alternative basis for new families consistent with the content of this standard.

### 9.3 Text Assignment

This standard recommends the use of ARIAL. All text shall be restricted to the following sizes: Recommend use of ARIAL

Text height (mm) Plotted full size	Line Weight Allocation	Usage
1.8	2	General text, dimensions, notes – used on A3 & A4 size drawings
2.5	3	General text, Dimensions notes
3.5	4	Sub-headings,
3.5	5	General text, dimensions, notes – A0 drawings
5.0	7	Normal titles, drawing numbers
7.0	8	Major titles

## 9.4 Line Weights

Line weights control the graphical display of on-screen data and all published output. Line weights assigned to model elements are scale dependent while those associated with annotation are fixed.

Note that line weights must be coordinated between all linked models. The host file governs all line thickness of the same name.

Pen	1:10	1:20	1:50	1:100	1:200	1:500
1	0.13	0.13	0.13	0.13	0.13	0.13
2	0.15	0.15	0.15	0.15	0.15	0.15
3	0.13	0.13	0.13	0.05	0.05	0.05
4	0.15	0.15	0.15	0.13	0.05	0.05
5	0.18	0.18	0.18	0.15	0.13	0.05
6	0.20	0.20	0.20	0.18	0.15	0.13
7	0.25	0.25	0.25	0.20	0.18	0.15
8	0.35	0.35	0.35	0.25	0.20	0.18
9	0.40	0.40	0.40	0.35	0.25	0.20
10	0.50	0.50	0.50	0.40	0.35	0.25
11	0.60	0.60	0.60	0.50	0.40	0.35
12	0.70	0.70	0.70	0.60	0.50	0.40
13	1.00	1.00	1.00	0.70	0.60	0.50
14	2.00	2.00	2.00	1.00	0.70	0.60
15	3.00	3.00	3.00	2.00	1.00	0.70
16	4.00	4.00	4.00	3.00	2.00	1.00

\* Pen 1 reserved for Material Hatches

\* Pen 2 reserved for Ceiling Grids

### Perspective and Annotation










Pen	
1	0.06
2	0.13
3	0.15
4	0.18
5	0.20
6	0.25
7	0.35
8	0.40
9	0.50
10	0.60
11	0.70
12	1.00
13	1.40
14	2.00
15	3.00
16	4.00

There are 16 model line weights. Each can be given a plotted thickness across the range of drawing scales

- Thin Lines mode **shall not** be used as this distorts the production requirements of publication output and promotes over-modelling and over-detailing.
- Line weights are assigned project-wide by category of component and can be overridden by view and by element. Individual lines on elements can also be overridden. Overriding should be kept to a minimum to aid consistency.
- The plotted appearance of modelled components should be represented in a manner that provides “depth” to the drawing and allows for adequate differentiation of elements cut in section, profile view, and priority elements.

### ISO Standard Metric Line Widths

The following line widths are ISO compliant and have been incorporated into the above line weights.

0.13mm	
0.18mm	
0.25mm	
0.35mm	
0.50mm	
0.70mm	
1.00mm	
1.40mm	
2.00mm	

## 9.5 Line Patterns

The supplied templates contain a number of defined line patterns for use in all drafting production work. Any additional line patterns should be created by the BIM Co-ordinator and named according to the project naming conventions described in [Section 8, “Project Naming Conventions.”](#)

Name:	Line Pattern
Aligning Line	-----
Center	-----
Centre	-----
Dash	-----
Dash dot	-----
Dash dot dot	-----
Demolished	-----
Dot	-----
Dot 1mm	-----
Dot 2mm	-----
Double dash	-----
Grid Line	-----
Hidden	-----
Long Dash	-----
Loose dash	-----
Overhead	-----
Rebar Cover Lines	-----
Triple dash	-----

## 9.6 Line Styles

Line styles are defined in the supplied templates as a project setting. Any additional line styles should be created by the BIM Co-ordinator and named according to the project naming conventions described in [Section 8, “Project Naming Conventions.”](#)

## 9.7 Hatching and Filled Regions

- Default Fill Patterns for model and drafting, which are loaded into the default templates, should be used.
- Alternative fill patterns should be used only with the approval of the BIM Co-ordinator.
- Hatching and patterning should be created using the relevant tools available within the software.
- Where possible, hatch patterns should be assigned to the relevant materials for the elements rather than assigned as 2D patches.
- Care should be taken to ensure that the draw order and transparency settings of filled regions are appropriate to the situation so as not to cover required graphical information.



## 9.8 View Templates

The default templates have a number of pre-defined View Templates. View Templates should be used to maintain consistency across published output.

- Adjustments to the settings of the View Templates should be carried out only with the agreement of the BIM Co-ordinator.

## 9.9 Drawing Borders and Title Blocks

- Corporate titleblocks are available from the families' area of the central resource folder.
- Alternative client-specific versions may also be available from the same location.
- Project-specific titleblocks should be created and stored in the Project Resource folder.
- Logos should be native Revit line work and filled regions rather than images

## 9.10 Annotation Symbols

Standard symbols such as North Point, section marks, and call-ups are available from within the discipline-specific template files and should be used by default.

### 9.10.1 Section and Detail Marks

Section and detail marks should be accessed from within standard template files, Revit's default repository, or the central BIM library.

## 10 QUALITY CONTROL / QUALITY ASSURANCE (QC / QA)

### 10.1 Model Maintenance

Revit models need to be maintained on a regular basis to enhance stability, speed, and performance. Certain issues can cause models to become corrupt if not dealt with regularly and can, consequently, have a direct impact on the ASME and AEC teams.

### 10.2 Central Files

The central file should never be opened during the regular workflow of a project. Central files are opened only for maintenance purposes.

The central file should be recreated and saved as a new central at consistent intervals in order to eliminate redundant data retention. This should be done on a regular basis at between approximately 300 and 500 saves to model.

Local files should be created daily to improve performance.

Opening a project via the saved local file (Update Time Stamp) and performing a “Reload Latest” should be avoided. This is used only in cases where models are temporarily separated from the network for specific purposes.

### 10.3 Compacting Central and Local Files

Compacting the central reduces the file size when saving workset-enabled files. During a normal save, Revit-based applications only write new and changed elements to the existing files, causing the files to become large but increasing the speed of the save operation. The compacting process rewrites the entire file and removes obsolete parts to save space.

Because the compacting process takes more time than a normal save, use the compact option when the workflow can be interrupted. Compacting should be done by the BIM manager or the Model Manager.

### 10.4 Importing and Linking Files

Unload all links of all types, which are not needed in the model.

Temporarily unload links if they are not needed in the view, and reload them as required to limit memory resources necessary to open a project file.

#### 10.4.1 Warning Messages

Warning messages, particularly related to geometric errors or clashes, must be dealt with on a regular basis and resolved. Users should not ignore warning messages, and a review of the list should be done by a BIM Manager frequently.

Warnings should be kept under less than 200. Models with warnings over 200 affect view performance and can create other issues with the model.

Annotative warnings are not as important as geometric, but all cause performance issues.

## 10.5 Model Archiving Practice

Models must be archived prior to issuing of models. Use eTransmit to ensure gathering of models and linked files associated with each model.

Models must be archived in their completion and entirety at each documentation issue date and phase. The archiving should include linked files plus a DWF/PDF set of the issued documents and kept in a folder labelled as such.

## 10.6 Electronic Exchange between Consultants

Prior to the exchange of the model, the file types and contents along with the structure need to be agreed upon.

The following formats are included in transfer:

- Revit
- Navisworks
- DWF/PDF
- IFC

Sheets from the model must be published as DWF or PDF or another non-editable format where they can be checked, approved, issued, and archived as traditional documents and then distributed to the team for coordination.

When viewed in the model, the current sheets are classed as “work-in-progress,” and so it is preferable to remove them from the model to stop any confusion over what is validated information.

For large and complex projects, splitting up the model into zones or packages of works may be necessary. When this occurs, a model matrix should be created to document the file structure and then be included in the BxP.

To aid the validation process, a check list containing the following points should be created to confirm what has been validated:

- Address and fix warning messages weekly.
- Audit the model weekly (File Open Audit).
- Compact the model weekly.
- Remove temporary views, 3D views, sections, and elevations weekly.

- Avoid the linking of CAD files for anything other than reference. Do not import CAD files, but recreate them in Revit using Revit entities.
- Purge is executed only by the BIM Manager and should not be globally run on families.

### Notes

- Use eTransmit in all cases for the transfer of models. (eTransmit is available through the Autodesk subscription site.)
- If design options and/or phasing are used with the model, a detailed explanation of these is required in the BxP. A summary should accompany the transmitted model.

## 10.7 Model Saving

Maximum number of Revit back-ups should be set to minimum of five (5) times the total number of users working on the model. Confirm storage availability with the IT team responsible for the project. Note that if your team is less experienced, you may need to increase this number to ten (10). Please note also that if you are overwriting your central file, you will lose all historical network-based backups. Remember to archive your project before overwriting the central model.

Users should “Save to Central” at least hourly. Avoid a lockup of the model, the synchronized saving should be coordinated at particular intervals, especially if a large team is working in one model. Use of the Worksharing Monitor to see activity on the model is a good practice.

The Revit Save Reminder Interval should be set to 30 minutes.

The starting view within all model files is to be set to a pre-defined generic view, such as a detail view or a legend view. These pre-defined views should be retained and the file information completed for each model issue.

## 11 3D COORDINATION

### 11.1 Approach

3D Coordination provides a means to create better designs and help identify and deal with potential issues that show up later on in the field. By creating a consolidated model, we can then use this model as a tool to help understand individual building elements and their relationships to each other. This process relies heavily on the BxP.

### 11.2 Model Consolidation

Consolidating all of the project models and all of the required scopes creates the building information model. This model now becomes the data hub of the project and should incorporate an appropriate level of detail that facilitates the 3D coordination process. Modelling should take place in compliance with the project BxP – namely, the model origins. This model may be built by using BIM authoring tools or clash detection programs.

### 11.3 Coordination Meetings

Coordination meetings are required to highlight potential coordination issues. In order to solve potential issues at the design or construction level, these meetings need to have the right team members with the right expertise. Team members should meet on a weekly basis to discuss design issues. All potential issues need to be compiled into an interference report prior to the coordination meeting in order to maximize time and efficiency.

### 11.4 Issue Resolution

Resolving issues at the early design stages reduces RFIs (Requests for Information) and change orders later in the project. Identifying these problem areas prior to the release of the Consolidation Set (commonly referred to as the Issued for Construction (IFC) documents) creates better value for clients and project team members. If problems arise after the release of the Consolidation Set, and if these cannot be resolved at the weekly coordination meeting, an official RFI is created referencing the Consolidation Set documents to highlight the issue for resolution. A number of Contract Administration Instruments can be used to this end.

## APPENDIX A - DEFINITIONS / TERMS

**2D: Two Dimensional** – This term generally refers to CAD typical drawings or contract documents.

**3D: Three Dimensional** – This term generally refers to models which have a Z-access dimension.

**3D Coordination:** Construction Information Modelling (sometimes referred to as CIM) occurs during the construction (and maintenance) process and the clash detection process when potential conflicts and issues may be identified using 3D collaboration and coordination software tools.

**4D/5D:** These are terms generally used in reference to associated information used in construction – 4D refers to scheduling and 5D refers to cost that is related to a BIM.

**AEC:** An abbreviation that stands for Architecture, Engineering, and Construction. This acronym refers to the collective of professions working in the creation and maintenance of the built environment.

**AEC(CAN) BIM Protocol:** A practical BIM protocol aimed at eliminating technical wording of official documents in order to make BIM-related procedures and methodologies more accessible.

**Asset Information Model (AIM):** This term describes the set of information (documentation, graphical model, and non-graphical data) accrued in the project operation and in-use phase. (See also **Project Information Model (PIM)**).

**BIM Execution Plan (BxP):** A written plan that integrates the BIM tasks and information with all the stakeholders and processes.

**BIM Protocol:** This document identifies building information models that are required to be produced by the project team and puts in place specific obligations, liabilities, and associated limitations on the use of those models.

**Building Information Model (BIM):** A digital representation of the physical and functional characteristics of a facility using a collection of elements and/or information that serves as a shared knowledge resource for that facility. Typically, a BIM may be used from the schematic design phase right through to operations; BIM provides building owners with a high degree of reliable information.

**Building Information Model Management (BIM Management):** This term refers to the activity of keeping the BIM aligned with standards and uses. The BIM Manager, who is a cross-platform professional, usually undertakes this management.

**Building Information Modelling:** This term describes the activities required to make the model and relate various information to that model. **Building Information Modelling** is the activity that creates the model as well as meaningful relationships between the model and other data, both internal and external.

**buildingSMART:** A non-profit organization that identifies and delivers construction, “share structured data” standards such as IFC and ISO Standards (formerly International Alliance for Interoperability (IAI)).

**CAD:** This abbreviation refers to Computer Aided Drawing/Drafting software tools that frequently feed/are fed by the BIM.

**CAFM:** Please see **Computer Aided Facilities Management**.

**CIM:** Please see **3D Coordination**.

**Cloud:** This term broadly refers to computer resources used for processing storage or communication. These resources may be used in the execution of BIM projects.

**COBie (Construction Operations Building Information Exchange):** A standard protocol for BIM projects in which (generally) spreadsheet-based information is progressively developed in order to document the construction process and then pass that standard on to the building operator.

**Consolidation Set:** Documents issued to facilitate construction by expressing the design intent.

**CSI ([www.csinet.org](http://www.csinet.org)):** The CSI is developing a comprehensive terminology library and dictionary for North America, thanks to a grant from the National Center for Energy Management and Building Technology.

**Family:** The file containing objects that may be used in a design that can contain one or many members and that are differentiated by changing parameter values.

**Family Category:** Each family usually belongs to a category to assist with filtering in a project. For example, a family category might be "trees," which would then serve as the category for several families in a particular project.

**Federated Model:** The facility comprised of a number of connected but distinct, individual models representing parts of a facility. The subdivisions are often established along the lines of the consultant. However, on larger projects, the facility itself may need to be divided because of the size of the model.

**IAI (International Alliance of Interoperability):** The former name for buildingSMART.

**IDM (Information Delivery Manual):** A document that is normally part of the BIM Execution Plan.

**IFC (Industry Foundation Classes):** A standard XML-based IFC developed by buildingSMART. The IFC is an open source information model used for sharing data in the construction and facilities management industries.

**IFC (Issued For Construction):** See **Consolidation Set**.

**IFD (International Framework Dictionary):** This resource is being developed by the buildingSMART Alliance and is an open, shared, international terminology library that structures object-oriented information exchange.

**Integration:** This term refers to the ability to manage and communicate product and project data between software tools and collaborators, enabling the integration of business, planning, and delivery processes.

**Interoperability:** This term describes the ability and process to transform model data from one software platform to another. Interoperability allows access to BIM data across compliant software tools. Standards such as IFC allow interoperability between technical platforms.

**IPD (Integrated Project Delivery):** This is a contractual form relevant to the BIM design and construction process. At present the IPD has not been widely adopted outside the USA.

**Level:** This is an object used to define specific levels, which can include floors, roofs, or other elements in a building. These levels can define a plane that is used by objects as reference.

**LOD (Level of Development):** LOD scales are applied to provide a common understanding of information requirements at different stages of a project (developed from info published by American Institute of Architects in Form E202). Refer to the Draft LOD Specification Ver. 2 for further specific detail. (BIM Forum <http://bimforum.org/lof/>)

**Mass Model:** The type of model file that contains only the volumes describing a project or a component (and not the detail).

**Model:** This is a general term used to refer to the computer file(s) that may contain BIM data.

**MASTERFORMAT:** This is the recognized industry standard used for categorizing building products for more than 40 years. MasterFormat 2004 Edition replaces MasterFormat 1995, expanding the well-known "16 Divisions" to 50 Divisions of construction information.

**Object:** In Revit, an object is any discreet building component or element which can be parametric, but may also be static. These building components virtually represent their real-world counterparts.

**OmniClass:** This is a classification system used in the USA, which is similar to (but not directly interoperable) with UniClass.

**OOTB (Out of the Box):** This abbreviation refers to configurations, settings, or content (families, templates, and data), which is included with the base Revit distribution.

**Open BIM:** An approach (orchestrated by buildingSmart) that provides accessible collaborative in-design realization and operation of buildings based on open standards and workflows.

**Parameter:** This is a data field that can be used to contain information about an object, but can also be used as a variable to drive certain physical conditions of an object. Parameters can also be used in calculations related to objects or entire facilities.

**Parametric Modelling:** The approach by which a model is created and can be modified by the changes in parameter values, or may be controlled through the creation of rules and/or constraints. Changes to parameters, rules, or constraints can change individual objects or make large scale changes to entire models. The parametric approach must be approached carefully.

**Parametric Objects:** These objects can be changed or influenced by changes to related parameters, rules, or constraints.

**Permitted Purpose:** This purpose relates to the facility, which is consistent with the required LOD (Level of Development) and agreed to at the BxP stage of the project.

**Point Cloud:** This term describes the number of ordinate data points represented in a 3D object. This cloud is generally created using LiDaR technology and can be used and coordinated with BIM projects.

**.RVT** – This is the file format used by Revit.

**Shared Coordinates:** The means by which an abstract model's coordinate system can be related to the real world.

**SIM (Site Information Modelling):** BIM for site design, civil engineering, and construction.

**XML (Extensible Markup Language):** XML is a general-purpose specification for creating custom markup languages for computer software. It is classified as an extensible language because it allows the user to define the markup elements. XML's purpose is to aid information systems in sharing structured data, to encode documents, and to serialize data. Revit makes use of several XML formats for this purpose, one example of which is LANDXML.



# APPENDIX B – STAMP RECOMMENDATIONS

Volume 1 | Chapter 1.1.5 | The Organization of the Profession in Canada

## Chart 5F: Comparison of Provincial or Territorial Requirements/ Guidelines regarding the APPLICATION of SEALS

The following comparisons contain excerpts from provincial or territorial Architects Acts and rules. Please refer to the full text for a complete understanding of the legislation.

Provincial Association	Requirements or Guidelines re: SEALS
<b>AIBC</b>	<p>77 (1) An architect must apply a seal, with signature and date, to letters of assurance, certificates, drawings and specifications prepared by or under the architect's supervision, direction or control if the architect practises architecture...</p> <p>78 A member of the institute or a licensee must not affix his or her seal to a plan, working drawing, detail drawing, specification or other document unless it was prepared under the supervision, direction or control of the member or licensee. (Architects Act)</p>
<b>AAA</b>	<p>2 (2) No person except a registered architect, visiting project architect, architects corporation or architects and engineers firm shall ...</p> <p>(c) affix a seal or a stamp of a registered architect or the stamp of a visiting project architect, architects corporation or architects and engineers firm, or permit that seal or stamp to be fixed, to a plan, drawing, detail drawing, specification, or other document or a reproduction of any of them unless</p> <p>(i) that plan, drawing, detail drawing, specification or other document or reproduction was prepared by or under the personal supervision, direction and control of, and</p> <p>(ii) the seal or stamp is affixed with the knowledge, consent and in accordance with the direction of the registered architect or visiting project architect to whom or the architects corporation or architects and engineers firm to which the seal or stamp was issued by the Registrar. (Architects Act)</p>
<b>SAA</b>	<p>2.02 Every member shall have a seal, supplied by the Association, the impression of which shall contain the name of the member, the member's registration number and place of business, and the words "Registered Architect, Saskatchewan" and the name of the Association.</p> <p>.1 The seal when affixed to drawings, shall bear the member's signature and the date.</p> <p>.2 The seal is the property of the Association. If a person ceases to be a member of the Association, their seal shall be promptly delivered to the office of the Association. If the member is reinstated, the seal shall be returned to the member.</p> <p>.3 The practice of electronic sealing is recognized, and regulations in this bylaw shall apply to it accordingly, modified as needed to accommodate the changed format. (Bylaws)</p>
<b>MAA</b>	<p>11.4 (b) All working drawings, specifications and the certificates involved in the practice of architecture when issued shall bear the seal and signature of the Registered Member responsible for the design as well as the date on which the seal and signature were affixed.</p> <p>(c) Whenever a Registered Member uses his/her seal, his/her signature shall appear across the seal. In the case where there is more than one name on the seal, at least one of the Registered Members named there-on shall sign the seal.</p> <p>11.5 (b) All working drawings, specifications and certificates involved in the practice of architecture which are prepared by, through or on behalf of an Architectural Corporation, Partnership of Architectural Corporations, Joint Architectural and Engineering Firm or Joint Architectural and Engineering Corporation, shall bear the seal and signature of the Registered Member responsible for the design and the stamp of the Architectural Corporation or Partnership of Corporations, Joint Architectural and Engineering Firm or Joint Architectural and Engineering Corporation, as well as the date on which the stamp, seal and signature were affixed.</p> <p>(c) Whenever a an Architectural Corporation, Partnership of Architectural Corporations, Joint Architectural and Engineering Firm or Joint Architectural and Engineering Corporation uses its stamp, the signature of the Registered Member responsible for the design shall appear across the stamp of the Architectural Corporation, Partnership of Corporations, Joint Architectural and Engineering Firm or Joint Architectural and Engineering Corporation. (Bylaws)</p> <ul style="list-style-type: none"> <li>Seals are required on working drawings, specifications, and certificates.</li> <li>Also, seals are required on reports prepared by Corporations.</li> </ul>
<b>OAA</b>	<p>The seal and signature must be applied to "every design prepared under his or her personal supervision and direction and issued or exhibited to a person who is not a holder and is submitted as part of an application for a building permit or is used for the construction, enlargement or alteration of a building, except in the case of an open competition in which anonymity is a requirement" (Regulation 27, 42(21))*</p>

Provincial Association	Requirements or Guidelines re: SEALS
<b>OAQ</b>	An architect must identify by means of his signature and seal all plans, preliminary or working specifications, work supervision reports, payment certificates, change orders, work completion certificates and experts' reports, prepared for architectural work by himself or under his immediate control and supervision. <i>(Regulation respecting the Code of Ethics 3.04.01)</i>
<b>AANB</b>	15(3) Unless exempted by by-law, every member or licensee practising architecture in New Brunswick in his own name shall sign, date and affix his stamp to all designs, specifications, reports, contracts and other documents pertaining to the practice of architecture which have been prepared by the member or licensee, or under the direct supervision of the member or licensee. 15(5) Every person authorized to practice architecture under this Act who fails to sign and affix their stamp to a final construction document, as required by this section, is guilty of professional misconduct. <i>(Architects Act)</i>
<b>NSAA</b>	32 Every licensed architect must have a seal of a design authorized by the regulations, and shall bear the name of the licensed architect and the words "licensed architect, Nova Scotia Association of Architects". 33 All technical submissions prepared by a licensed architect, or under the architect's responsible control, shall be sealed with the seal of the licensed architect and signed by the licensed architect, signifying that the licensed architect was in responsible control of the content of the technical submissions and has applied the required standard of care. 34 No licensed architect may sign or seal technical submissions unless prepared by or under the responsible control of the architect, except that (a) the architect may sign or seal those portions of the technical submissions that were prepared by or under the responsible control of persons who are licensed under this Act if the architect has reviewed and adopted in whole or in part such portions and has either co-ordinated their preparation or integrated them into the architect's work; and (b) the architect may sign or seal those portions of the technical submissions that are not required by this Act to be prepared by or under the responsible control of an architect if the architect has reviewed and adopted in whole or in part such submissions and integrated them into the architect's own work. 35 Any licensed architect signing or sealing technical submissions not prepared by that architect, but prepared under that architect's responsible control by persons not regularly employed in the office where the architect is resident, shall maintain and make available to the Board upon request for at least five years following such signing and sealing, adequate and complete records demonstrating the nature and extent of the architect's control over and detailed knowledge of such technical submissions throughout their preparation.
<b>AAPEI</b>	16. (3) Every member or licensee practising architecture in Prince Edward Island in his own name shall sign and affix his stamp to all final designs or construction documents which have been prepared by such person or under the supervision of such person. (4) Every proprietorship, partnership or corporation practising architecture in Prince Edward Island shall affix its stamp to all designs which have been prepared by the proprietorship, partnership or corporation, and have such designs signed by a member or licensee designated on the certificate of practice. (5) Every person authorized to practice architecture under this Act who fails to sign and affix their stamp to a final design or construction document, as required by this section, is guilty of professional misconduct. <i>(Architects Act)</i>
<b>NLAB</b>	33.2 (2) All final drawings, specifications, plans, reports and other documents involving the practice of architecture, when issued, shall bear the signature and seal of the architect who prepared or approved them. <i>(Architects Act)</i>
<b>NWTAA</b>	89.(c) The stamp shall be affixed to a document only when the professional taking responsibility is satisfied that the work has been completed to an acceptable standard. The responsible professional shall sign across the imprint of the stamp and indicate the date of the signature. 89.(g) The permit stamp shall be affixed to a document only after the professional or professionals taking responsibility have affixed their personal stamps. The officer or employee, so authorized by the Permit Holder, shall affix the stamp, sign across the imprint of the stamp and indicate the date of the signature. <i>(By-Laws)</i>

\* OAA Bulletin A.1 describes the appropriate use of the Architect's professional seal including the electronic application of the seal.

## APPENDIX C – CREATIVE COMMONS ATTRIBUTION-SHAREALIKE 4.0 INTERNATIONAL LICENSE

This work is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License](https://creativecommons.org/licenses/by-sa/4.0/). You are free to:

- Share - copy and redistribute the material in any medium or format
- Adapt - remix, transform, and build upon the material) for any purpose, even commercially

The licensor cannot revoke these freedoms as long as you follow the license terms.

Under the following terms:

- Attribution — You must give appropriate credit, provide a link to the license, and indicate if changes were made. You may do so in any reasonable manner, but not in any way that suggests the licensor endorses you or your use.
- ShareAlike — If you remix, transform, or build upon the material, you must distribute your contributions under the same license as the original.
- No additional restrictions — You may not apply legal terms or technological measures that legally restrict others from doing anything the license permits.

Notices:

- You do not have to comply with the license for elements of the material in the public domain or where your use is permitted by an applicable exception or limitation.
- No warranties are given. The license may not give you all of the permissions necessary for your intended use. For example, other rights such as publicity, privacy, or moral rights may limit how you use the material.

